

IP65


Designed and constructed with high performance in mind, this luminaire provides a clean, crisp wash of light. The copper hood accessory provides effective glare control and is suitable for low mounted path and access lighting.

SPECIFICATIONS

LED Source	LED 3 W ⁽¹⁾ ■ Warm white (3000 K typical)
Control Signal	PWM 24 V DC
Dimmable	Recommend using G615-PWM0-10MNA for 0-10 V dimming <i>NOTE: 4 wires circuit required to be run to luminaire.</i>
IP Rating	IP65
Construction	Polished copper and brass Powder coated aluminium ■ Black ■ Silver
Installation Type	Recessed wall mount
Ambient Operating Temperature	-20 °C to 40 °C
Accessories <i>Order separately</i>	G615-PWM0-10MNA 0-10V dimmer system G612 wall plate dimmer G603-CU Copper hood G603-C* Aluminium hood: powder coated Black or silver powder coat available

NOTE: Any luminaire can become hot - take care with appropriate use and placement.


⁽¹⁾ Nominal power consumption using a DC power supply. Actual power consumed may vary. Power supply not included.

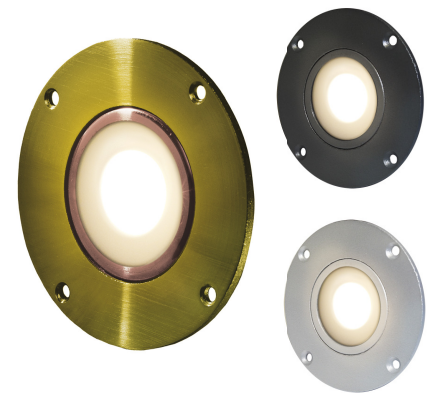


G431-LED Melia
Polished brass



G603-CU Copper hood

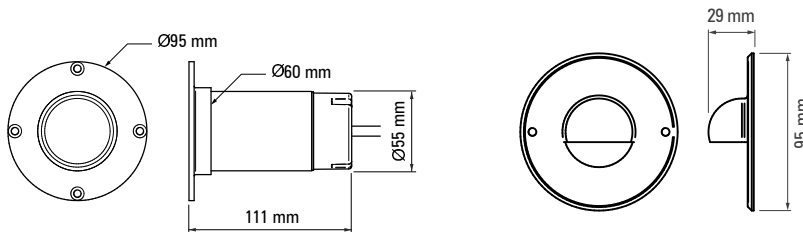

CONFIGURE THIS PRODUCT >

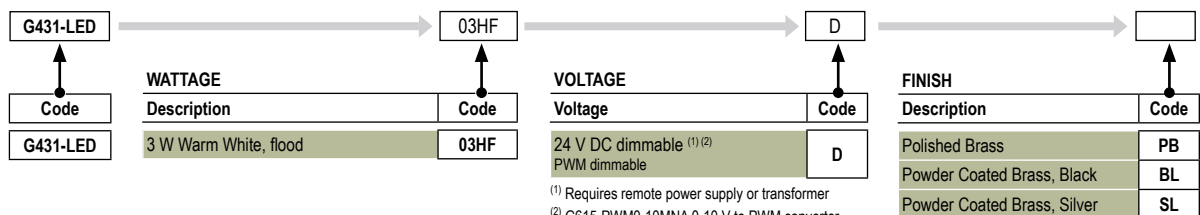

⁽¹⁾ Requires remote power supply or transformer
⁽²⁾ G615-PWM0-10MNA 0-10 V to PWM converter recommended for single colour dimming - order separately.