

IP65

This popular low voltage spike mount luminaire is ideal for garden applications. This luminaire is suitable for outdoor applications where it can provide either a decorative lighting effect or it can perform a more utilitarian role.

SPECIFICATIONS


LED Source	LED 6 W ⁽¹⁾ <ul style="list-style-type: none"> ■ Warm white (3000 K typical)
Control Signal	PWM 24 V DC
Dimmable	Recommend using G615-PWM0-10MNA for 0-10 V dimming <i>NOTE: 4 wires circuit required to be run to luminaire.</i>
IP Rating	IP65
Construction	Polished copper Powder coated aluminium <ul style="list-style-type: none"> ■ Black ■ Silver
Installation Type	Spike mount
Ambient Operating Temperature	-20 °C to 40 °C
Accessories <i>Order separately</i>	G615-PWM0-10MNA 0-10V dimmer system G612 wall plate dimmer G624-CU Copper glare shield G624-C* Aluminium glare shield: powder coated Black or silver powder coat available

NOTE: Any luminaire can become hot - take care with appropriate use and placement.


⁽¹⁾ Nominal power consumption using a DC power supply. Actual power consumed may vary.
 Power supply not included.



G451-LED Astelia

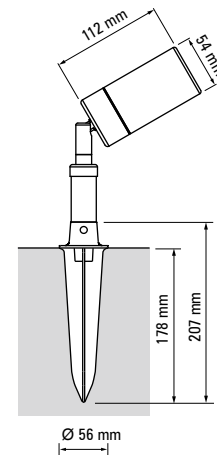

CONFIGURE THIS PRODUCT >

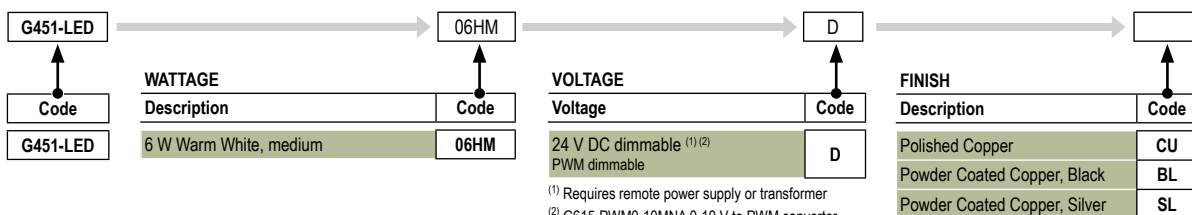

⁽¹⁾ Requires remote power supply or transformer
⁽²⁾ G615-PWM0-10MNA 0-10 V to PWM converter recommended for single colour dimming - order separately.