

IP65

The G511-LED / G512-LED are compact, adjustable spotlight luminaire used for grazing walls whilst providing light at ground level. Constructed of marine grade stainless steel, these luminaires provide a decorative lighting effect in residential or resort environments.

SPECIFICATIONS


LED Source	LED 3 W or 2 x 3 W ⁽¹⁾ ■ Warm white (3000 K typical)
Control Signal	PWM 24 V DC
Dimmable	Recommend using G615-PWM0-10MNA for 0-10 V dimming <i>NOTE: 4 wires circuit required to be run to luminaire.</i>
IP Rating	IP65
Construction	Electropolished 316 marine grade stainless steel
Installation Type	Wall mount
Ambient Operating Temperature	-10 °C to +40 °C
Accessories <i>Order separately</i>	G615-PWM0-10MNA 0-10V dimmer system G612 wall plate dimmer

NOTE: Any luminaire can become hot - take care with appropriate use and placement.


⁽¹⁾ Nominal power consumption only, actual power consumed may vary.




G511-LED Villa
Low voltage



G512-LED Double Villa
Line voltage

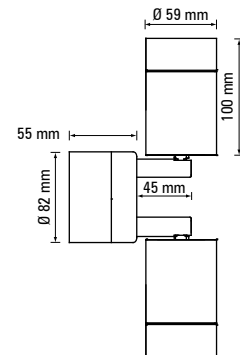

CONFIGURE THIS PRODUCT >

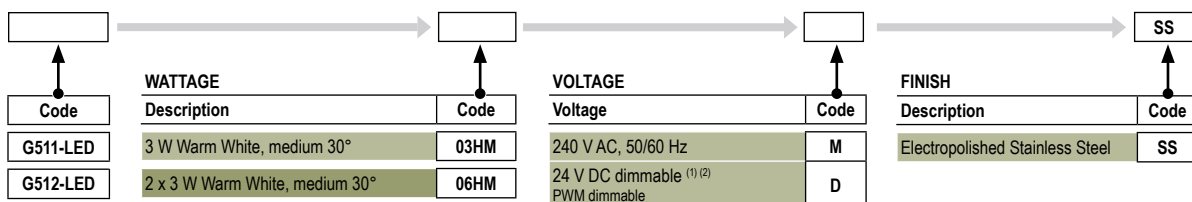

⁽¹⁾ Requires remote power supply or transformer
⁽²⁾ G615-PWM0-10MNA 0-10 V to PWM converter recommended for single colour dimming - order separately.