

IP65

The G561-LED / G562-LED is a low voltage pole mount luminaire delivering light in a controlled manner, with a choice of one or two adjustable light heads to direct the light where needed. This model is ideal for illuminating low level plantings or objects of interest in a landscape.

**SPECIFICATIONS**


<b>LED Source</b>	LED 3 W or 2 x 3 W <sup>(1)</sup> <span style="color: #FFD700;">■</span> Warm white (3000 K typical)
<b>Control Signal</b>	PWM 24 V DC
<b>Dimmable</b>	Recommend using <b>G615-PWM0-10MNA</b> for 0-10 V dimming <i>NOTE: 4 wires circuit required to be run to luminaire.</i>
<b>IP Rating</b>	IP65
<b>Construction</b>	Electropolished 316 marine grade stainless steel
<b>Installation Type</b>	Pole mount
<b>Ambient Operating Temperature</b>	-10 °C to +40 °C
<b>Accessories</b> <i>Order separately</i>	<b>G615-PWM0-10MNA</b> 0-10V dimmer system <b>G612</b> wall plate dimmer

NOTE: Any luminaire can become hot - take care with appropriate use and placement.


<sup>(1)</sup> Nominal power consumption only, actual power consumed may vary.




G561-LED Lucente

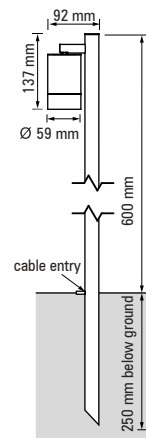

G562-LED Double Lucente

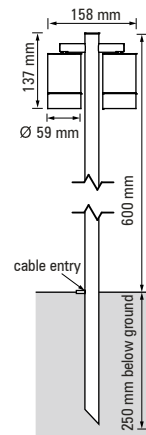

**CONFIGURE THIS PRODUCT >**

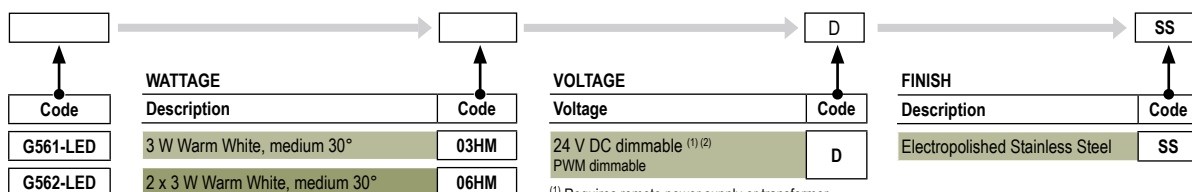

<sup>(1)</sup> Requires remote power supply or transformer  
<sup>(2)</sup> G615-PWM0-10MNA 0-10 V to PWM converter recommended for single colour dimming - order separately.